

# Herringbone Click Castle


## 14 mm Click



Technical information	
<b>Produced according to:</b>	European parquet norm EN 13489 - 2017
<b>Dimension:</b>	14 x 209 x 1045 mm
<b>Toplayer:</b>	3.5 mm nominal
<b>Construction:</b>	3-layer construction; Hardwood toplayer, middlelayer made of HDF and bottomlayer made of spruce Toplayer            3.5 mm nominal Middlelayer       8.8 mm Bottomlayer       1.7 mm
<b>Profile:</b>	5G Click, not combineable with other Boen products
<b>Installation:</b>	floated or glued
<b>Boards/ m<sup>2</sup> per carton:</b>	6/ 1.31 A-planks and B-planks as separate articles
<b>Cartons/ m<sup>2</sup> per pallet:</b>	30/ 39.3
<b>Slotted top layers per carton/ minimum length (mm):</b>	-
<b>Weight per carton/ pallet in kg:</b>	15/ 450
<b>Floor heating systems:</b>	Well suitable
<b>Fire behavior <sup>1)</sup>:</b>	Dfl-s1
<b>Content of formaldehyd <sup>2)</sup>:</b>	E1
<b>Content of pentachlorophenol (PCP) <sup>2)</sup>:</b>	no performance detected
<b>Density kg/ m<sup>3</sup> <sup>2)</sup>:</b>	about 600
<b>Antislip performance:</b>	Live Natural sanded USRV 59 <sup>4)</sup> R10 <sup>5)</sup> Live Natural brushed USRV 45 <sup>4)</sup> R10 <sup>5)</sup> Live Pure brushed USRV 91 <sup>4)</sup> R11 <sup>5)</sup>
<b>Abrasion resistance:</b>	
<b>Thermal conductivity <sup>2)</sup>:</b>	0.14 W/ (m·K)
<b>Areal thermal resistance <sup>3)</sup>:</b>	0.09 (m <sup>2</sup> ·K)/ W

**5G**

Click System

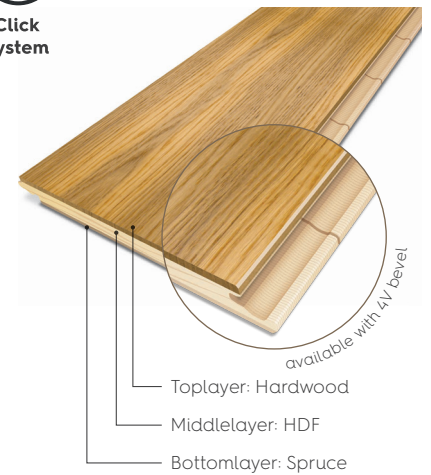

**CE**

**BOEN AS**  
EN 14342

DOP 4658



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)



<sup>1)</sup> according to DIN EN 13501-1, <sup>2)</sup> according to DIN 14342, <sup>3)</sup> according to EN 12524,

<sup>4)</sup> according to CEN/TS 15676, <sup>5)</sup> according to DIN EN 51130