


# Plank Castle

14 mm Click

Technical information	
Produced according to:	European parquet norm EN 13489 - 2017
Dimension:	14 x 209 x 2200 mm
Toplayer:	about 3.5 mm
Construction:	3-layer construction; Hardwood toplayer, middlelayer and bottomlayer made of spruce Toplayer about 3.5 mm Middlelayer 8.8 mm Bottomlayer 1.7 mm
Boards/ m <sup>2</sup> per carton:	6/ 2.76
Cartons/ m <sup>2</sup> per pallet:	50/ 138
Slotted top layers per carton/ minimum length (mm):	-
Weight per carton/ pallet in kg:	24/ 1200
Floor heating systems:	Well suitable to very well suitable
Fire behavior <sup>1)</sup> :	Cfl-s1 and Dfl-s1 depending on wood specie and surface treatment
Content of formaldehyd <sup>2)</sup> :	E1
Content of pentachlorophenol (PCP) <sup>2)</sup> :	no performance detected
Density kg/ m <sup>3</sup> <sup>2)</sup> :	about 600
Antislip performance:	Live Satin USRV 25 <sup>2)</sup> Live Matt USRV 29 <sup>2)</sup> Live Natural USRV 40 <sup>2)</sup>
Abrasion resistance:	Live Satin 70/ 1100 <sup>3)</sup> Live Satin 100 <sup>4)</sup>
Thermal conductivity <sup>2)</sup> :	0.15 W/ (m·K)
Areal thermal resistance <sup>3)</sup> :	0.093 m <sup>2</sup> · K/ W



Click System

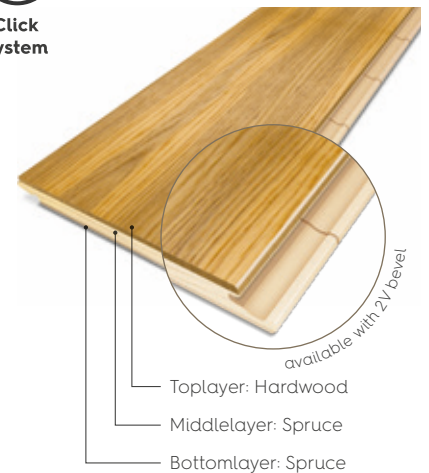

DOP 4658



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)

**CE**  
**BOEN AS**  
 EN 14342



<sup>1)</sup> according to DIN EN 13501-1, <sup>2)</sup> according to DIN 14342, <sup>3)</sup> according to ENV 13696,

<sup>4)</sup> according to DIN 68861, <sup>5)</sup> according to EN 12524