


# LONGSTRIP STRONGLINE 21 mm tongue/ groove

## Technical information:

<b>Produced according to:</b>	European parquet norm EN 13489 - 2017	
<b>Dimension:</b>	21 x 139 x 2200 mm	
<b>Toplayer:</b>	about 5.5 mm	
<b>Construction:</b>	3-layer construction; Hardwood toplayer, middlelayer and bottomlayer made of spruce Toplayer about 5.5 mm Middlelayer 10.5 mm Bottomlayer 5 mm	
<b>Boards / m<sup>2</sup> per carton:</b>	6/ 1.83	
<b>Cartons/ m<sup>2</sup> per pallet:</b>	42/ 76.86	
<b>Divided boards per carton/ minimum length (mm):</b>	1/ 600	
<b>Weight per carton/ pallet in kg:</b>	21/ 882	
<b>Floor heating systems:</b>	Well suitable	
<b>Fire behavior <sup>1)</sup>:</b>	Cfl-s1 and Dfl-s1 depending on wood specie and surface treatment	
<b>Content of formaldehyd <sup>2)</sup>:</b>	E1	
<b>Content of pentachlorophenol (PCP) <sup>2)</sup>:</b>	non performance detected	
<b>Density kg/ m<sup>3</sup> <sup>2)</sup>:</b>	about 600	
<b>Antislip performance:</b>	Live Satin	USRV 25 <sup>2)</sup>
	Live Matt	USRV 29 <sup>2)</sup>
	Live Natural	USRV 40 <sup>2)</sup>
<b>Abrasion resistance:</b>	Live Satin	70/ 1100 <sup>3)</sup>
	Live Satin	100 <sup>4)</sup>
	Sport lacquer T79:	
	Coefficient of friction:	80-110 <sup>6)</sup>
	Dynamic coefficient of friction:	0.4-0.6 <sup>7)</sup>
<b>Thermal conductivity <sup>2)</sup>:</b>	0.15 W/ (m·K)	
<b>Areal thermal resistance <sup>5)</sup>:</b>	0.14 m <sup>2</sup> · K/ W	

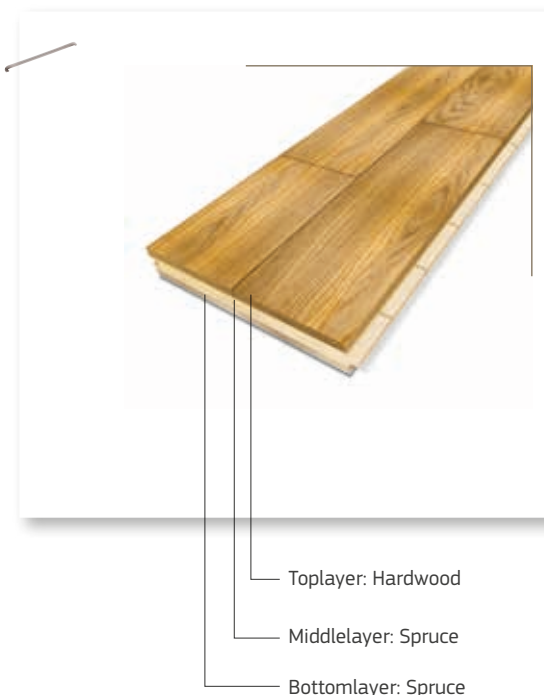

**BOEN AS**  
EN 14342  
DOP 4658



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)



<sup>1)</sup> according to DIN EN 13501-1, <sup>2)</sup> according to DIN 14342, <sup>3)</sup> according to ENV 13696, <sup>4)</sup> according to DIN 68861, <sup>5)</sup> according to EN 12524, <sup>6)</sup> according to DIN EN 14904, <sup>7)</sup> according to DIN 18032